


中机非晶铁心参数(1.3T，三相三柱式)

该系列产品特点：

三相三柱三柱非晶铁心适合制作Yyn0联结和Dyn11联结组变压器。其制成的变压器外形尺寸更加协调美观，俯视投影面积小，产品结构经济性较优，容量大的变压器采用本结构时要选用适当的制作工艺。

容量 KVA	图号	A mm	B mm	C mm	D mm	E mm	R1	R2	净重 (kg)	铁损 (W)	励磁功率 (VA)	铁心 只数	单台重量 (kg)
30	K30-54-41.5	305	405	41.5	146	49.0	55	42	54	11	33	1	114
	K30-30-41.5	220	120	41.5	146	49.0	6.4		30	6	18	2	
50	N50-80-47.0	335	435	47.0	174	55.5	62	47	80	16	48	1	166
	N50-43-47.0	235	125	47.0	174	55.5	6.4		43	9	26	2	
63	N63-96-53.0	350	470	53.0	174	62.5	69	53	96	19	58	1	198
	N63-51-53.0	240	130	53.0	174	62.5	6.4		51	10	31	2	
80	N80-112-58.0	390	490	58.0	174	68.4	75	58	112	23	67	1	232
	N80-60-58.0	265	130	58.0	174	68.4	6.4		60	12	36	2	
100	T100-127-54.0	380	475	54.0	217	63.7	73	54	127	26	76	1	265
	T100-69-54.0	265	130	54.0	217	63.7	6.4		69	14	42	2	
125	T125-150-60.0	400	500	60.0	217	70.8	77	60	150	30	90	1	310
	T125-80-60.0	275	130	60.0	217	70.8	6.4		80	16	48	2	
160	T160-177-66.0	445	520	66.0	217	77.9	84	66	177	36	106	1	365
	T160-94-66.0	305	130	66.0	217	77.9	6.4		94	19	57	2	
200	T200-202-70.0	490	550	70.0	217	82.6	89	70	202	41	121	1	420
	T200-109-70.0	340	135	70.0	217	82.6	6.4		109	22	66	2	
250	T250-240-77.5	525	590	77.5	217	91.5	98	78	240	48	144	1	496
	T250-128-77.5	360	140	77.5	217	91.5	6.4		128	26	77	2	
315	T315-276-83.5	585	610	83.5	217	98.5	105	84	276	56	166	1	576
	T315-150-83.5	405	140	83.5	217	98.5	6.4		150	30	90	2	
400	T400-348-94.0	650	685	94.0	217	110.9	117	94	348	70	209	1	722
	T400-187-94.0	450	155	94.0	217	110.9	6.4		187	38	112	2	
500	K500-214-90.5	605	670	90.5	146	106.8	113	92	214	43	128	2	880
	K500-113-90.5	410	155	90.5	146	106.8	6.4		113	23	68	4	
630	K630-273-108.5	590	760	108.5	146	128.0	134	109	273	55	164	2	1078
	K630-133-108.5	360	165	108.5	146	128.0	6.4		133	27	80	4	

[产品外形图]

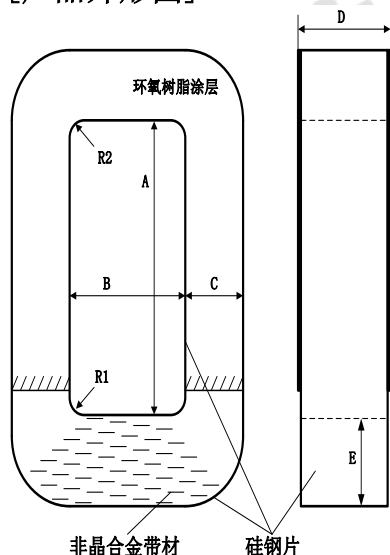

[产品装配示意图]

